


## How to fit Roller blinds


**1** Choose the way you brackets are to be fitted depending on whether you want to fit into the recess or face fix.

outside the window - follow face fix instructions


recess size - follow top fix or face fix instructions

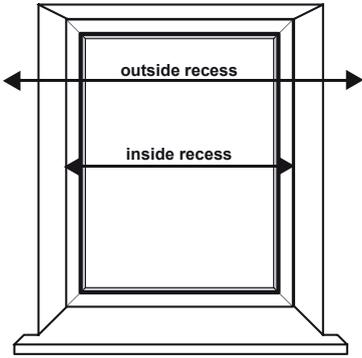

**2** **Top Fix**  
The brackets are universal and can be fitted to the lintel (under side of the recess) or to the window frame (similar to face fix). Fit the bracket shown in fig.4 on the side the controls have been fitted on the blind.

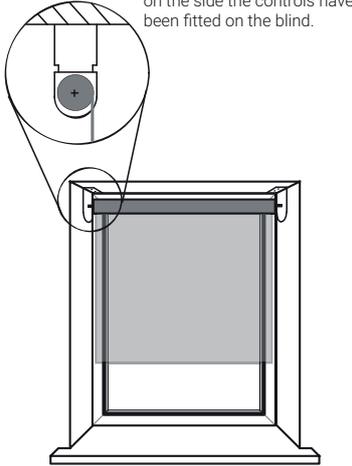


**3** **Face Fix**  
The brackets are universal and can be fitted to the wall face recess). Fit the bracket shown in fig.4 on the side the controls have been on the blind.

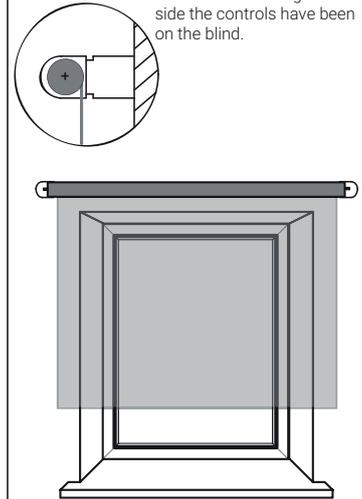


**4** The control end must be fitted first.

Make sure the 4 plugs on the end of the control align with the bracket.


Push the centre plug into the vertical part of the cross and push down to lock in place

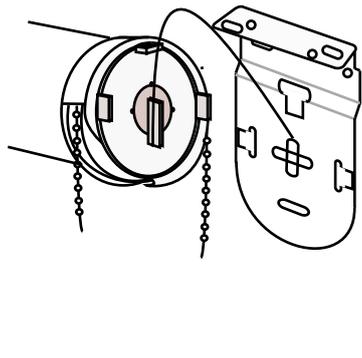

**5** Each end of the roller blind is different. One end is spring loaded as shown below. When the brackets have been installed, push the spring loaded end into the hole (in the shape of 'O'). The spring plug can push in by 1cm to give a better fit if needed.

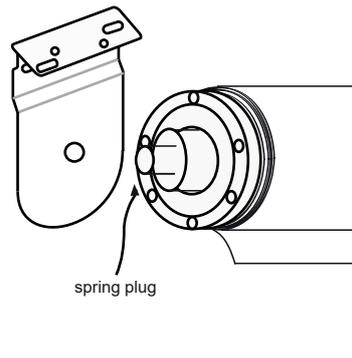

**6** In the package you are sent a child safety tie down clip. Attach this to the wall or frame to secure the chain as shown below.

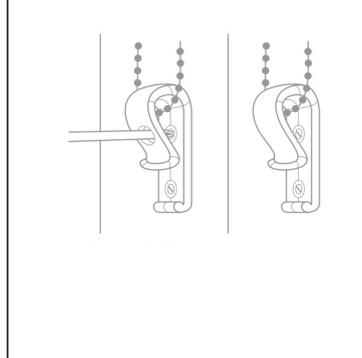

### Suggested Tools

screwdriver  
drill (5mm)  
pencil  
tape measure  
spirit level  
screws  
wall plugs

**Your blind should come with a child safety device which must be screwed into the wall during the installation of the blind to prevent the cords/chains creating a loop. Failure to fit this device could result in strangulation.**

[Click here to shop roller blinds](#)